


HH-MINICOAX 75 Ohm + 2 x 0,5 mm² MB Black

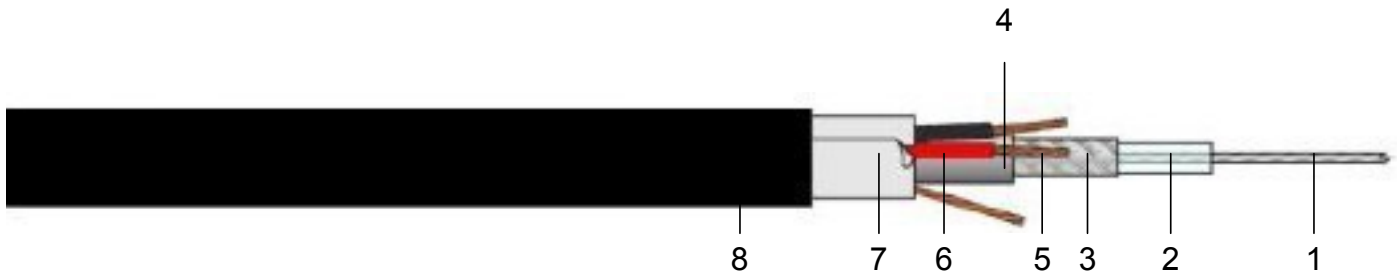

Partnumber: 55010049

Construction:

1. Conductor: 0,14 mm², tinned copper, 18 x 0,100 mm
2. Dielectric: PE Foam, Ø 1,50 mm ± 0,05 mm, colour white
3. Shielding: Tinned copper, 16 x 4 x 0,100 mm, 85% coverage
4. Sheath: PVC AF RZ, colour Grey RAL 7001, according to standard: IEC 60332.3A, Ø 2,80 mm ± 0,1
5. Conductors: Bare copper, 0,5 mm², 16 x 0,193, class 5
6. Insulation: 0,5 mm², PVC AF R2, Ø 1,65 mm ± 0,05 mm, colour Red/Black
7. Total shielding: Duplex AL-PET, with 20 mm, thickness μ 9/12, bare copper drain wire sect. 0,22 mm, 7 x 0,180
8. Outer sheath: PVC AF RZ, colour black, according to standard IEC 60332.3A

Printing: HH Minicoax 75 Ohm + 2 x 0,5 Qmm/55010049, batch, IEC 60332.3A & meter by meter marking

Note:

Overall diameter: 6,50 mm ± 0,1 mm
Voltage: 300/500 V
Temperature: -5 / +70°C
Conductor resistance: Max. 39 Ohm x km



Tel. +31 (0) 183 - 617 109, Fax +31 (0) 183 - 614 087, www.helmacab.nl