


KLM-LSZH

75 V

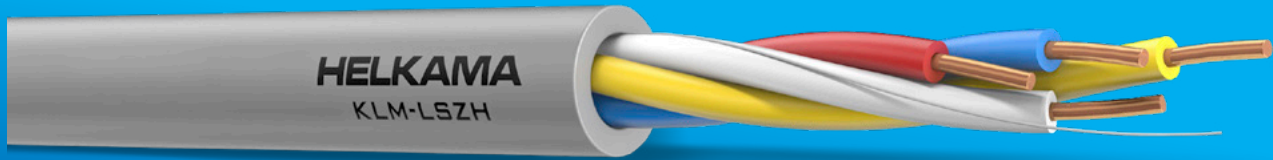

CONDUCTOR	Solid copper conductor
INSULATION	PE
STRANDING	Conductors twisted together
SHEATH	LSZH Thermoplastic Standard colour light grey
REFERENCE STANDARD	EN 50288-7, SFS 2751

APPLICATION

Cable for instrumentation, alarm systems and personal call finders. For fixed installation.

PHYSICAL PROPERTIES:

MIN. BENDING RADIUS (installation/fixed)	15 x Ø/10 x Ø
CORE IDENTIFICATION	1. Blue 2. Yellow 3. White 4. Red

MAIN CHARACTERISTICS:

FIRE PERFORMANCE	Dca, s2, d2, a1 IEC 60332-1-2
RATED VOLTAGE	75 V
MIN. INSTALLATION TEMPERATURE	-5 °C
OPERATING TEMPERATURE	-5 - 70 °C



ELECTRICAL PROPERTIES:

		Unit
Loop resistance (20 °C), max.	73.4	ohm/km
Insulation resistance, min.	> 500	Mohm x km
Test voltage DC 60 s		
Conductor/Conductor	2.25	kV

KLM-LSZH

Part number	No. of conductors x Conductor area (mm ²)	Nominal outer Ø mm	Weight kg/km	Standard length m	
3400225020	2 x 0.8 + 0.8	3.8 ± 0.3	19	150	box
3402225020	2 x 0.8 + 0.8	3.8 ± 0.3	19	600	drum
3400225040	4 x 0.8 + 0.8	4.4 ± 0.3	32	150	box
3402225040	4 x 0.8 + 0.8	4.4 ± 0.3	32	600	drum

