


Profibus SeaLine®

Cable type: 02YSH(ST)CH 1X2X0.75/2.55-150 LI VI FRNC

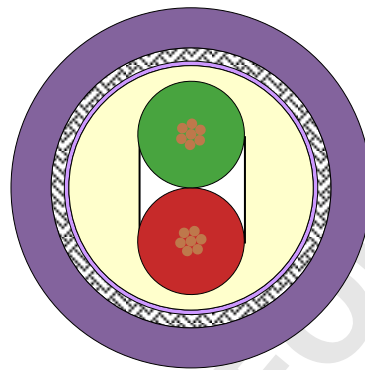

Design

Wire

Stranded bare copper wire 7 X 0.25 (22 AWG) (0.34mm²)
Insulation of foamed Polyethylene (PE) with skin

∅ 0.76 mm (0,030 in)
∅ 2.55 mm (0,100 in)

Core

2 wires, RD and GN twisted
Plastic tape, overlapped
Inner-Jacket: Thermoplastic copolymer (FRNC)
Alulaminat foil overlapped, applied longitudinally
Shield braiding of tinned copper wires 0.15 mm dia (35 AWG)
Coverage about 85%

∅ 5.5 mm (0,217 in)

∅ 6.2 mm (0,244 in)

Jacket:

Thermoplastic copolymer (FRNC) VT
Wall thickness about 0.9 mm

∅ (8.0 ± 0.4) mm (0.315 ± 0.016 in)

Printing: "sequential length in metres" * LEONI **SeaLine**® Profibus * L45467-G17-C46 * 02YSH(ST)CH
1X2X0.75/2.55-150 LI FRNC * IEC 60332-3-22 * "internal lot number"

Electrical data at 20°C

Loop resistance	≤	110	Ohm/km
Insulation resistance	≥	16000	MOhm*km
Characteristic Impedance			
3 - 20 MHz		(150 ± 15)	Ohm
31.25 - 38.4 kHz		(185 ± 18.5)	Ohm
9.6 kHz		(270 ± 27)	Ohm

LEONI Special Cables GmbH

Technisches Datenblatt – Technical Data Sheet – Technisches Datenblatt – Technical Data Sheet – Technisches Datenblatt – Technical Data Sheet

Attenuation

16 MHz	<	42	dB/km
4 MHz	<	22	dB/km
38.4 kHz	<	4	dB/km
9.6 kHz	<	2.5	dB/km
Capacitance 1 kHz	≈	28.5	nF/km
Capacitance unbalance to ground	≤	1500	pF/km
Operating voltage	≤	60	V
Test voltage (wire/wire/screen rms 50Hz 1min)		1000	V

Mechanical and thermal characteristics

Conductor material acc. to DIN EN 13602 Cu-ETP-A...
 Screen material acc. to DIN EN 13602 Cu-ETP-A...-B
 Insulating material acc. to DIN EN 50290-2-23 (VDE 0819), table 2/A (HD 624.3) (02Y)
 Jacket material acc. to IEC 60092-360 (IEC 60092-359) SHF1
 Flame retardant acc. to IEC 60332-1-2
 Oil resistant acc. to IEC 60811-2-1 (4 hours / 70°C)

Approved for Marine and Offshore Applications

DNV - GL Certificate No. TAE000025V
 Lloyds Register Certificate No. 07/20047
 Bureau Veritas Certificate No. 20147/B0 BV
 ABS Certificate No. 16-HG1512868-PDA

Other characteristics:

Flame retardant acc. to IEC 60332-3-22 (Cat. A/F)
 Halogen free acc. IEC 60754-1
 Smoke-density acc. to IEC 61034
 RoHS compliant (Directive 2011/65/EC)
 UV-resistant

Permissible temperature range : -25 °C (-13 °F) up to 80 °C (176 °F)
 Min. bending radius allowed : repeated 10X ø, single 5X ø
 Weight about : 84 Kg/km (56 lb/1000ft)

Designation of order:

L45467-G17-C46
 211958
 02YSH(ST)CH 1X2X0.75/2.55-150 LI VI FRNC
 1000 m (3281 ft) on non-returnable reel